
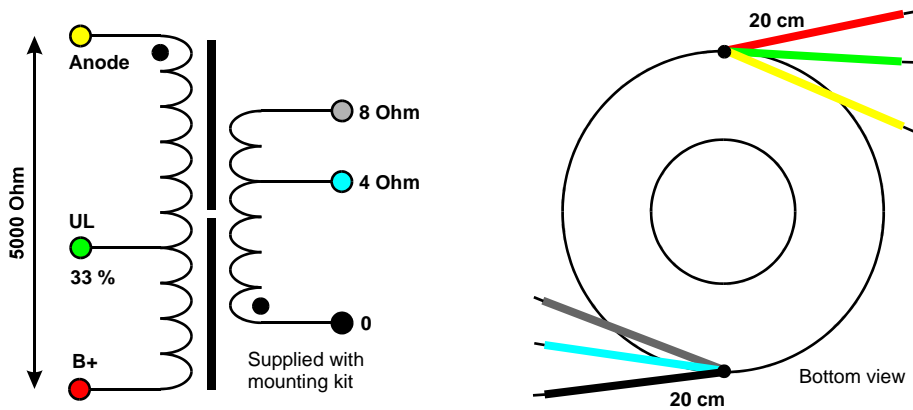


## WIDE BANDWIDTH TOROIDAL SINGLE ENDED OUTPUT TRANSFORMER

Type	:	<b>VDV-5006-SEE</b>	
Application	:	EL84 / 6V6 / ECL82 / ECL86	
Primary Impedance	:	Raa = 4.998	[kOhm]
Secondary Impedance 0-4-8 Ohm	:	Rls = 4	[Ohm]
Turns Ratio Np/Ns	:	Ratio = 35.349	[ ]
-3 dB Frequency Range; [Hz] to [kHz]	:	f13 = 27.086	fh3 = 56.236
Nominal Power	:	Pn = 6	[W]
Full Power Bandwidth starting at	:	fPnom = 32	[Hz]
Total Primary Inductance	:	Lp = 25	[H]
Primary Leakage Inductance to sec.	:	lsp = 14	[mH]
Effective Primary Capacitance	:	Cip = 0.8	[nF]
Saturation Primary DC-current	:	2·Idc = 97.998	[mA]
Total Primary Resistance	:	Rip = 87	[Ohm]
Total Secondary Resistance	:	Ris = 0.32	[Ohm]
UL-tap	:	UL = 33	[%]
Diameter	:	Dia = 91	[mm]
Height	:	Height = 43	[mm]
Weight (kg)	:	Weight = 1	[kg]

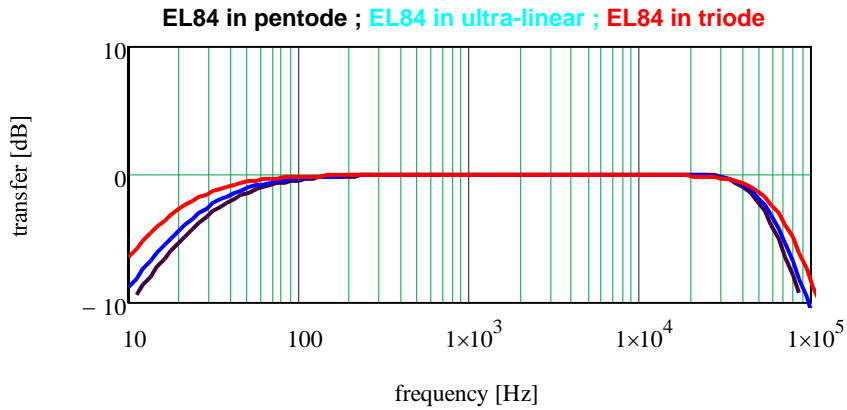

Copyright 2018: ir. bureau Vanderveen; design date 24-4-2018  
Specifications can deviate 15 % or improve without notice.